

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za




Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING FREESBY RANGE



NOXON: SEMI-AUTOMATIC ROTATING ARM STRETCH WRAPPING MACHINE FOR UNSTABLE OR HEAVY PRODUCTS

NOXON

flexibility & innovation

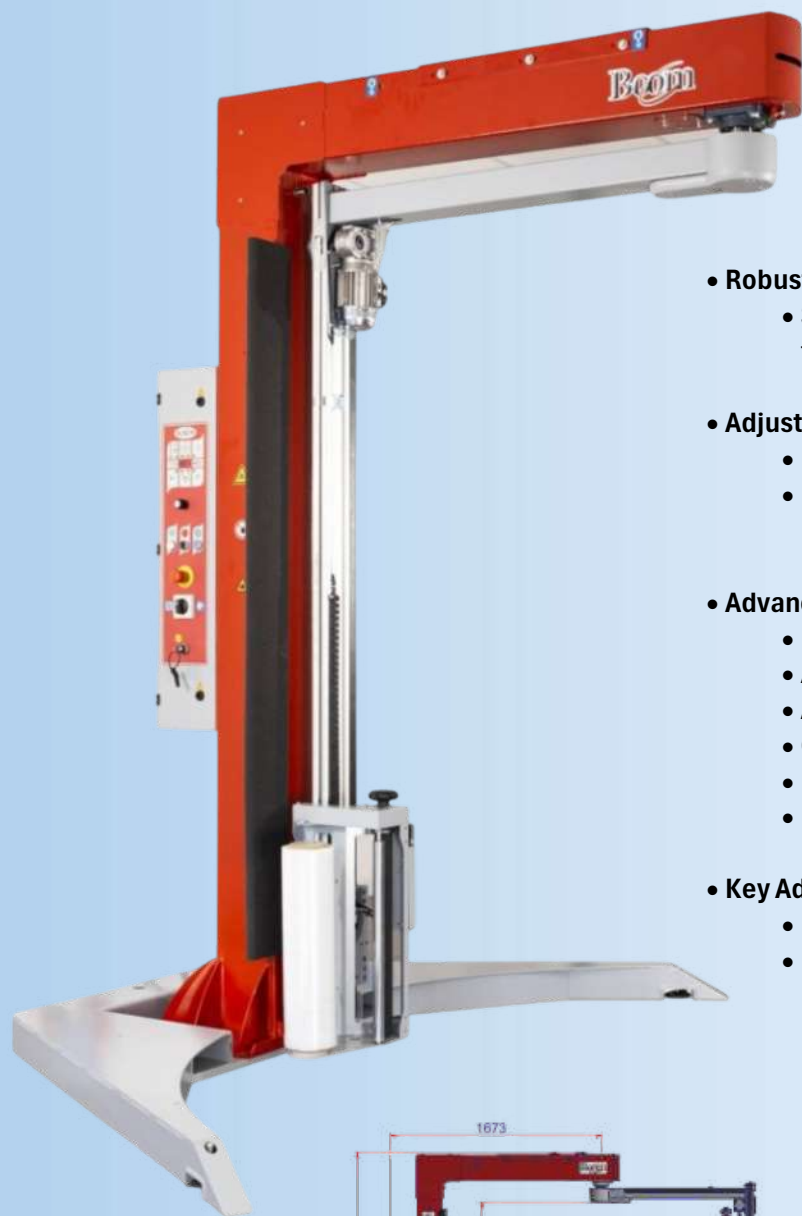

- **Robust and Reliable:**
 - Semi-automatic **rotating arm wrapper** from Noxon, designed for wrapping pallets with stretch film.
- **Adjustable Film Tension:**
 - Features a **carriage with mechanical brake**.
 - Film tension can be manually adjusted for precise wrapping needs.
- **Advanced Control Panel:**
 - Equipped with **jog control** for intuitive operation.
 - Allows customization of multiple parameters, including:
 - **Arm rotation speed.**
 - **Carriage movement** (up/down).
 - **High and low speed** settings.
 - **End-of-cycle carriage adjustment.**
- **Key Advantages:**
 - Ensures stable wrapping for irregular and delicate loads.
 - Provides user-friendly controls for tailored wrapping processes.

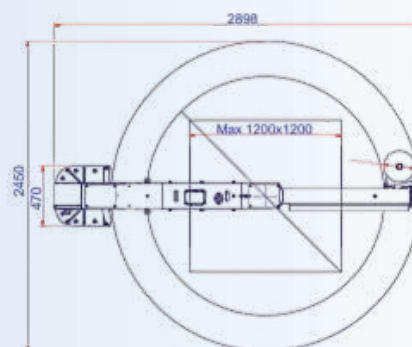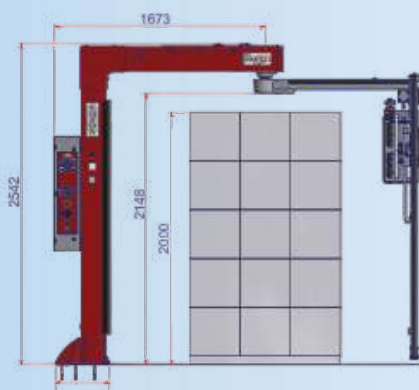

SCAN ME

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING FREESBY RANGE



CONTROL PANEL WITH JOG

- Arm rotating speed
- Top wraps
- Bottom wraps
- Upward-downward speed carriage
- Upward-downward cycle
- Upward or downward cycle
- Photocell delay
- Manual carriage upward-downward
- Rotary arm phasing button
- Carriage height at end cycle



CARRIAGE 202

Carriage with mechanical brake,
film tensioning manual adjustable

MACHINE	BOOM
Carriage type	Mechanical brake
Film stretch	Manual adjustment
Pre-stretch	Na
Power supply voltage	230V 1 PH(±15%) 50/60 Hz
Carriage up-down speed	2,6÷6 m/min
Arm rotation speed	7÷11 RPM
Productivity	20 (pallet/h)
Min product dimension	LxWxH 500x500x500 mm
Max product dimension	LxWxH 1200x1200x2000 mm
Emergency Bumper	STD
Phase stopping point	STD
Soft start	STD
Load height sensing by photocell - altimeter	STD
FILM FEATURES	
Reel max external diameter	ØxH 275x500 mm
Internal reel diameter	76 mm
Film thickness	7÷35 µm
Max reel weight	8 kg

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. NOXON RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT THE
TECHNICAL CHARACTERISTICS OF THE PRODUCTS AND ACCESSORIES ILLUSTRATED IN THE PRESENT DOCUMENT