

Tel: +27 21 557 3399

Email : info@progetto.co.za

CK 2008/087660/23

69 Lauda Road,

Killarney gardens, 7441



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING EKKO 301

NOXON: SEMI-AUTOMATIC TURNTABLE, FOR PALLET WRAPPING WITH STRETCH FILM




“X2” SPECIFICATIONS CONTROL

- Start and Stop
- Easy and simple



SCAN ME

**STANDARD
SIMPLE
STURDY**

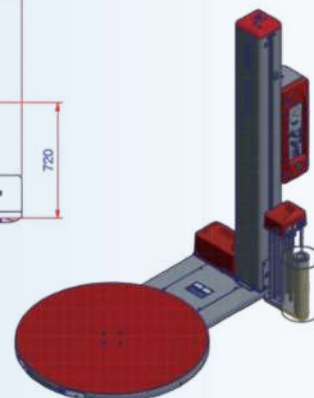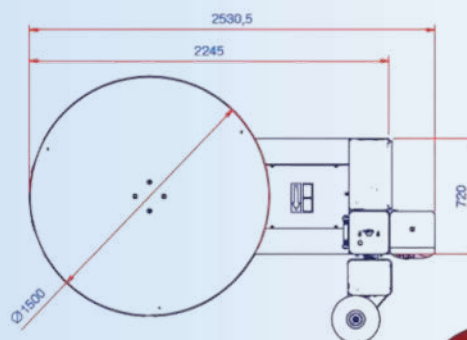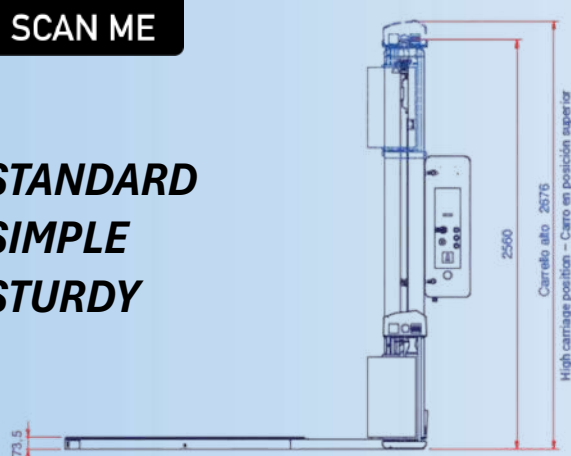

Tel: +27 21 557 3399

Email : info@progetto.co.za

CK 2008/087660/23

69 Lauda Road,

Killarney gardens, 7441



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING EKKO 301



301

FILM CARRIAGE WITH MANUALLY ADJUST-ABLE MECHANICAL BRAKE.

The "Film's Tension" adjustment allows to set the tension with which the film is applied to the product. The carriage is equipped with a quick engagement and disengagement device to facilitate the hooking of the film on the product.



X3 CONTROLLER

Operator Interface with graphic membrane keypad and 2.23" OLED DISPLAY

MACHINE	Ekko 302
Carriage type	Mechanical brake
Film Stretch	manual adjustment
Pre-Stretch	Na
Power supply voltage	(VAC) 230V 1 PH(±10%) 50/60 Hz
Installer Power	1.2Kw
Carriage up-down Speed	1,4÷4 m/min
Table Rotation speed	5÷12 rpm
Plate diameter	Ø 1500 STD (59") - Ø 1650 OPT (65")
Plate Capacity	1200kg - 2000kg Opt
Phase Stopping Point	STD
Progressive Start-up	STD
Photocell Delay	STD
Height Detection photocell	STD
Front and rear Forklift Capacity	STD
PRODUCT CHARACTERISTICS	
Min Product dimensions	LxWxH 500 x 500 x 500 (mm) / 20 x 20 x 20 (")
Max Product Dimensions	LxWxH 800x1200x2200 (mm) STD / 31 x 47 x 87 (" LxWxH 1000X1200X2400 (mm) OPT 39 x 47 x 94 ("
FILM FEATURES	
Max. External Diameter	300 mm / 12"
Reel height	500 mm / 20"
Film thickness	17÷35 µm
Internal Diameter	76 mm / 3"
Max spool weight	20 kg / 45 lb

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. NOXON RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT

THE TECHNICAL CHARACTERISTICS OF THE PRODUCTS AND ACCESSORIES ILLUSTRATED IN THE PRESENT DOCUMENT