

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING T3

NOXON: SEMI-AUTOMATIC TURNTABLE, FOR PALLET WRAPPING WITH STRETCH FILM

- **Ekko T3 – Turntable Stretch Wrapping Machine:**

- Designed for ease of use and adaptability in pallet loading operations.

- **T3 basement design:**

- Allows loading of the turntable with a pallet truck.
- Offers flexibility with the ability to change the loading side as needed.

- **Enhanced safety:**

- Specially designed acceleration and deceleration phases to ensure safe handling of unstable or delicate loads.

- **Advanced technology:**

- Equipped with a new carriage line for improved wrapping performance.
- Features the intuitive "X3" control system for ease of operation.

- **Reliable and durable:**


- Built to be robust and dependable for various packaging requirements.

- Suitable for industries requiring safe and efficient wrapping of delicate or unstable palletized loads.



SCAN ME

**Simple, sturdy
and reliable**

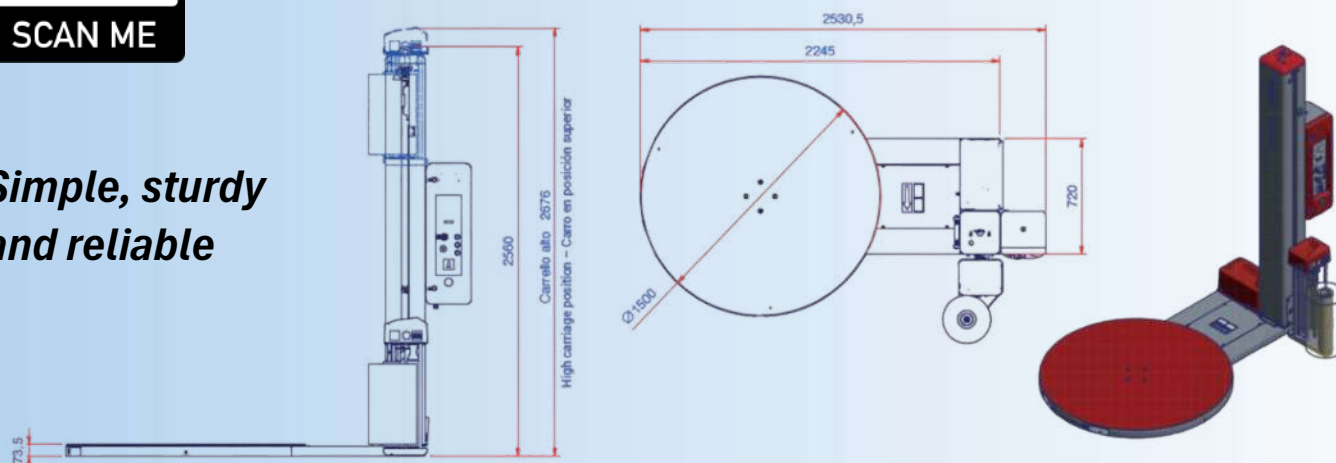

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING T3



302

**FILM CARRIAGE WITH MANUALLY ADJUST-
ABLE MECHANICAL BRAKE.**

The "Film's Tension" adjustment allows to set the tension with which the film is applied to the product. The carriage is equipped with a quick engagement and disengagement device to facilitate the hooking of the film on the product.



X3 CONTROLLER

Operator Interface with
graphic membrane
keypad and 2.23" OLED
DISPLAY



310

**Film carriage with electromagnetic
brake on return roller. Stretch tension
adjustable from control panel. Brake
coupling after cycle start for easy film
hooking to pallet base.**



312

**The carriage is fitted with a pre-
stretching system fixed at 250%,
Force to the load controlled by load
cell and adjustable from control
panel.**

MACHINE	Ekko T3 302	Ekko T3 310	Ekko T3 312
Carriage type	Mechanical brake	Electromagnetic power brake	Power Pre-stretch motorized
Film Stretch	Manual adjustment	Adjustable from panel	Potentiometer
Pre-Stretch	Na	Na	250%
Power supply voltage	(VAC) 230V 1 PH(±10%) 50/60 Hz		
Installer Power	1.2Kw	1.5Kw	1.9Kw
Carriage up-down Speed	1,4÷4 m/min		
Table Rotation speed	5÷12 rpm	5÷12 rpm	5÷12 rpm
Plate diameter	Ø 1500 STD (59”) - Ø 1650 OPT (65”)		
Plate Capacity	1200 kg (Ø 1500 mm) - 1500 kg (Ø 1650 mm)		
Phase Stopping Point	STD		
Progressive Start-up	STD		
Photocell Delay	STD		
Height Detection photocell	STD		
Front and rear Forklift Capacity	STD		
PRODUCT CHARACTERISTICS			
Min Product dimensions	LxWxH 500 x 500 x 500 (mm) / 20 x 20 x 20 (‘‘)		
Max Product Dimensions	LxWxH 800x1200x2200 (mm) STD / 31 x 47 x 87 (‘‘)		
FILM FEATURES			
Max. External Diameter	300 mm / 12’’		
Reel height	500 mm / 20’’		
Film thickness	17÷35 µm		
Internal Diameter	76 mm / 3’’		
Max spool weight	20 kg / 45 lb		

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. NOXON RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT

THE TECHNICAL CHARACTERISTICS OF THE PRODUCTS AND ACCESSORIES ILLUSTRATED IN THE PRESENT DOCUMENT