

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING FREESBY AS/AW

NOXON: Automatic turntable stretch wrapping machines with clamp, cutting and spreading unit.

- **FREESBY AS / AW**

- Automatic turntable stretch wrapping machines with clamp, cutting, and spreading unit.

- **Vertical rotating table design:**

- Ideal for companies requiring a sturdy, reliable, and high-productivity solution.

- **Advanced automation:**



- Equipped with an automatic gripper for efficient operation.
- Includes film cutting and coating systems for seamless wrapping.

- **Modern technology:**

- Designed and constructed using the latest technological advancements to ensure optimal performance.
- Suitable for a wide range of industries that demand reliable and efficient packaging solutions.



SCAN ME

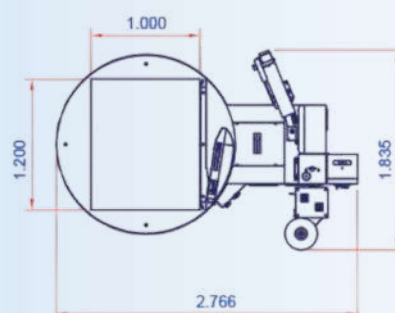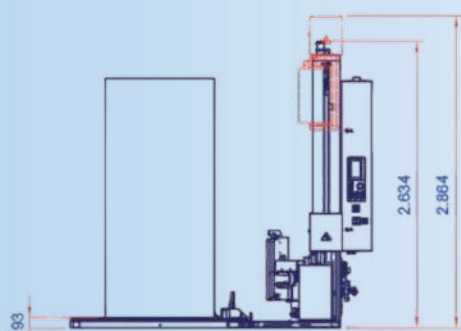

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING FREESBY AS/AW



AS

*Automatic clamp , cut
and
film spreading system*



AW

*Automatic clamp,
cut and
film smelting
system*

MACHINE	FREESBY AS 210 / AW 210	FREESBY AS 212 / AW 212	FREESBY AS 212 / AW 212
Carriage type	Electromagnetic power brake	Power Pre-stretch motorized	2 Variable per-stretch motors
Film Stretch	Adjustable from panel		
Pre-Stretch	Na	250%	150÷400%
Power supply voltage	230V 1 PH(±10%) 50/60 Hz		
Installer Power	2.1Kw	2.5Kw	2.9Kw
Carriage up-down Speed	1,5÷5,5 m/min		
Table Rotation speed	5÷12 rpm		
Plate diameter	Ø 1650 mm STD (Ø 1800 mm OPT)		
Plate Capacity	2000kg (2500kg OPT)		
Phase Stopping Point	STD		
Progressive Start-up	STD		
Photocell Delay	STD		
Height Detection photocell	STD		
Front and rear Forklift Capacity	STD		
Air Consumption	200NL/min		
Working Pressure	6 Bar		
PRODUCT CHARACTERISTICS			
Min Product dimensions	LxWxH 500x600x700 mm		
Max Product Dimensions	LxWxH 1200x1000x2200 mm)		
FILM FEATURES			
Max. External Diameter	300 mm / 12“		
Reel height	500 mm / 20“		
Film thickness	17÷35 µm		
Internal Diameter	76 mm / 3“		

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. NOXON RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT THE
TECHNICAL CHARACTERISTICS OF THE PRODUCTS AND ACCESSORIES ILLUSTRATED IN THE PRESENT DOCUMENT