

Tel: +27 21 557 3399

Email : info@progetto.co.za

CK 2008/087660/23

69 Lauda Road,

Killarney gardens, 7441



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPER MAS 3

NOXON: Robot MAS 3 – Mobile Pallet Wrapping Machine

NOXON




flexibility & innovation

- **Versatile and high-performing** solution for stabilizing **light and irregular loads** of various sizes.
- **Ease of use, working flexibility, and high productivity** make it ideal for diverse applications.
- **Modernized design** with an **updated graphic interface** for enhanced usability.
- **Advanced control panels (X4 and X5)** allow for **full cycle programming and performance monitoring**.
- **Integrated N-Connect system** supervises, processes, and archives data in real time for **optimized efficiency**.



SCAN ME

MAS3 LAYOUT

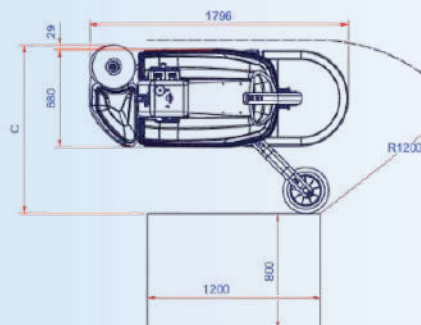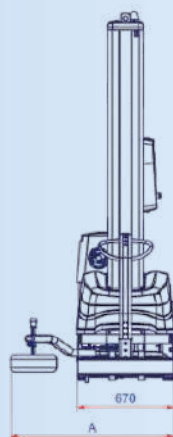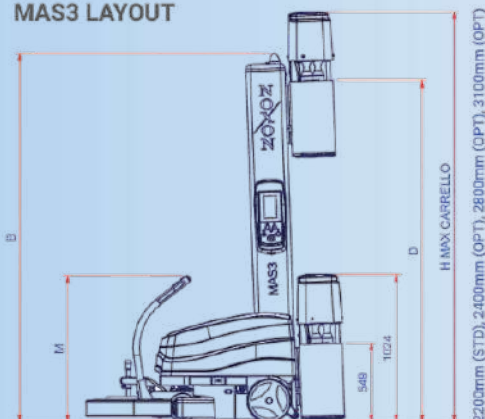

Tel: +27 21 557 3399

Email : info@progetto.co.za

CK 2008/087660/23

69 Lauda Road,

Killarney gardens, 7441



PALLET WRAPPER MAS 3




Control Panel X4

- 3.5" colour display + JOG to select programmes
- 10 winding programmes
- Possibility of film pull modification during the winding cycle




Control Panel X5

- 7" touch screen colour display
- New design and user experience (UX)
- 16 winding programmes and 8 pre-set applications
- Maximum customisation of wrapping parameters




Carriage 302

Mechanical tension control




Carriage 310

Electronic tension control



Carriage 312

Motorized pre_stretch system with one motor (250% fixed pre-stretch) and Independent tension control



Carriage 314

Motorized pre-stretch system with two independent motors (variable pre-stretch from 150% to 400%)

TECHNICAL FEATURES	MAS 3 X4			MAS 3 X5		
	302	310	312	310	312	314
Carriage type	Mechanical brake	Electromagnetic brake	Power pre-stretch motor-ized	Electromagnetic brake	Power pre-stretch motor-ized	Variable pre-stretch with 2 motor
Film stretch	Manual adjust-ment	Adjustable from panel				
Pre-stretch	N/A	N/A	250% (std)	N/A	250% (std)	150-400%
			150% / 200% / 300% (opt)		150% / 200% / 300% (opt)	
Power supply	100-240 V /1Ph 50/60 Hz					
Carriage up-down speed	1,5÷5 m/min			5 m/min		
Rotation speed	35÷80m/min					
Batteries	n2 12V 110Ah Pb					
Installed power	0.8 kW					
Overlap	N/A			5÷99 cm/giro		
Min product dimensions	LxWxH 600x600x500 mm					
Max product dimensions	LxWxH ∞x∞x2200 mm					
Minimun load weight	45 kg					
FILM FEATURES						
Reel dimensions	øxH 300x500					
Internal reel diameter	76 mm					
Film thickness	17÷35 µm					
Max reel weight	20 kg					

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. NOXON RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT THE TECHNICAL CHARACTERISTICS OF THE PRODUCTS AND ACCESSORIES ILLUSTRATED IN THE PRESENT DOCUMENT